

NSFR150J10 576V150Ah

LiFePO₄ Lithium Battery

Longer Cycle Life: Offers up to 15 times longer cycle life and 5 times longer float/calendar life than lead acid battery.

Lighter Weight: About 40% weight of a comparable lead acid battery, save up to 60% in weight.

Quick Charge: Short charge time compared with lead acid battery.

Low Self-Discharge: Lower self-discharge compared with lead acid battery, longer storage time without recharging.

Superior Safety: Multi-protection methods built inside to protect the battery from overcharge, over discharge and short circuit situation.

High Efficient: Higher round-trip energy efficiency of the average (92%) than lead acid battery 80% (discharge from 100% to 0% and back to 100% charged).




Specifications

Nominal voltage		576V
Nominal capacity		150Ah
Dimensions x4	Length	600±2mm (23.62inch)
	Width	800±2mm (31.49inch)
	Height	2000±2mm (78.74inch)
	Total height	2000±2mm (78.74inch)
Approx. weight		1036.0kg (2283.9lbs)±40kg


Characteristics

Electrical Parameters (25°C)	Rated Voltage	576V
	Rated Capacity (C ₅)	150Ah@25°C
	Energy	86.4kwh
	Months Self Discharge	<3%
	Charge Efficiency	99.5%@ 0.2C
	Discharge Efficiency	96-99%@ 1C
Terminal Diameter		M8
Internal resistance (Fully charged, 25°C)		≤200mΩ
Cycle life		>3000 cycles @ 0.2C 100%D.O.D
Capacity affected by temperature	40°C	101%
	25°C	100%
	0°C	90%
	-10°C	75%
Nominal operating temperature		25°C±3°C (77°F±5°F)
Operating temperature range	Discharge	-20°C~60°C (-4°F~140°F)
	Charge	0°C~45°C (32°F~113°F)
	Storage	0°C~40°C (32°F~104°F)
Water Dust Resistance		IP50
Charge Voltage		657V
Standard Charge Mode (25°C±2°C, <75%RH)		0.2CA Constant Current to 657V, then Constant Voltage 657V until the current drops to 0.02CA, before use, rest 30 minutes
Charge Current		30A
Maximum Charge Current		75A
Charge Cut off Voltage		657V
Continuous Discharge Current		150A
Maximum Pulse Current		300A (<100ms)
Discharge Cut Off Voltage		504V
Communicate Protocol (optional)		RS485/RS232
SOC (optional)		Screen/LED/PC Software
Application connection		1 string 1 parallel
Mechanical	Cells	180 Strings
	Container	Metal


Outer dimensions (mm)

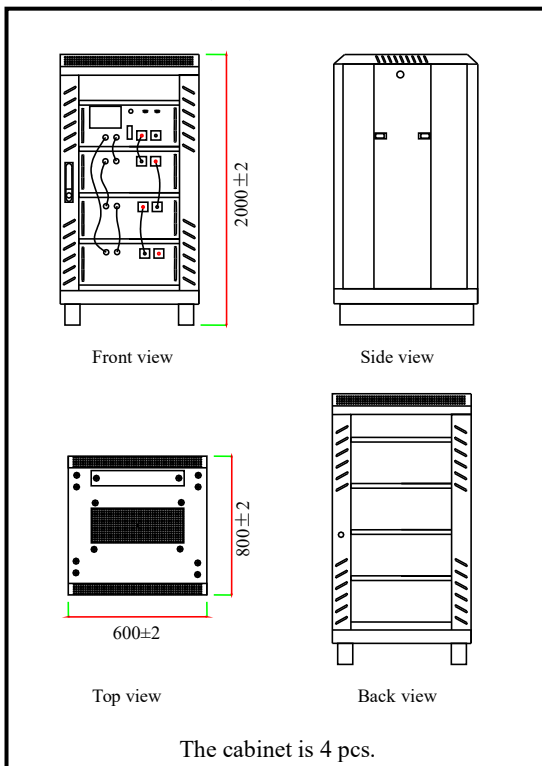


● Discharge characteristics (25°C)

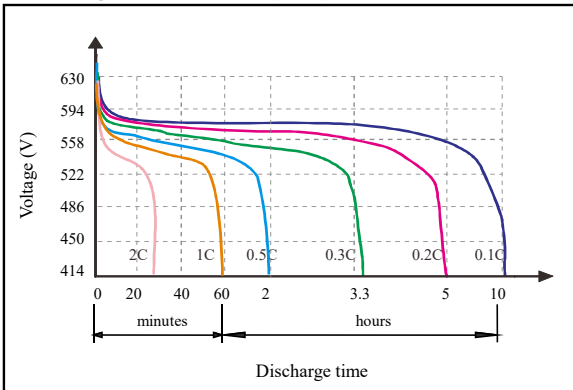


● Temperature affect on discharge characteristics (0.5C)

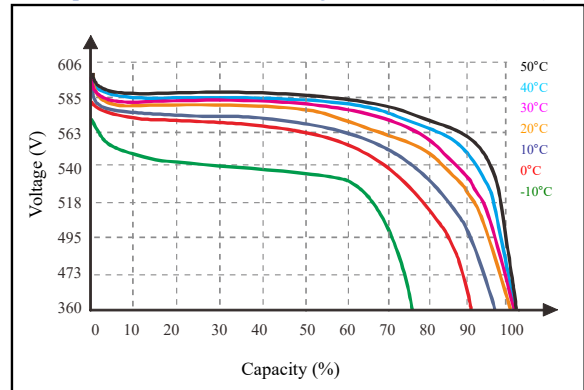


● State of Charge Curve (25°C)

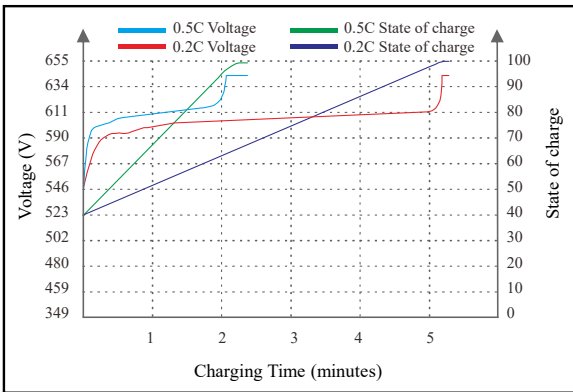


● Charge characteristics (25°C)

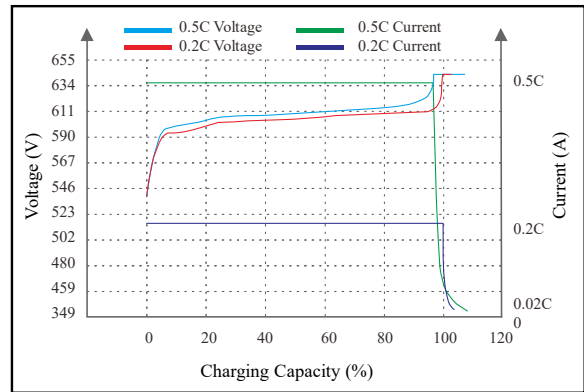

● Cycle life on D.O.D (25°C)

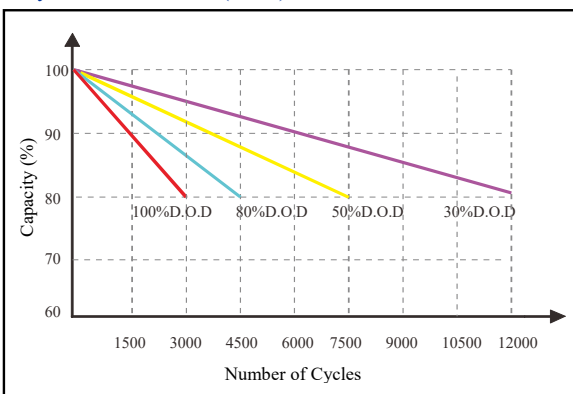

● Self Discharge Characteristics Curve

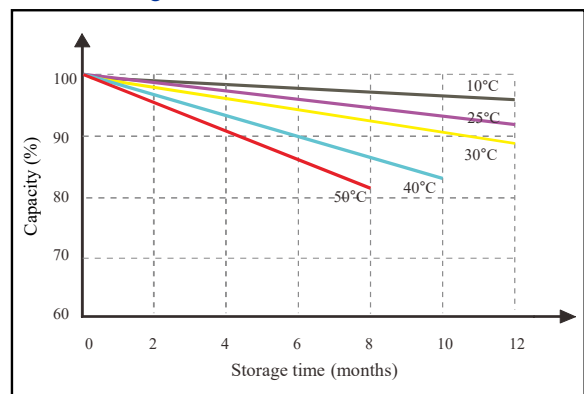

Note 2: The above curves are based on laboratory testing data @ 25°C 40%RH.