

## NSFE150S07 24V150Ah

### LiFePO<sub>4</sub> Lithium Battery

**Longer Cycle Life:** Offers up to 15 times longer cycle life and 5 times longer float/calendar life than lead acid battery.

**Lighter Weight:** About 40% weight of a comparable lead acid battery, save up to 60% in weight.

**Quick Charge:** Short charge time compared with lead acid battery.

**Low Self-Discharge:** Lower self-discharge compared with lead acid battery, longer storage time without recharging.

**Superior Safety:** Multi-protection methods built inside to protect the battery from overcharge, over discharge and short circuit situation.

**High Efficient:** Higher round-trip energy efficiency of the average (92%) than lead acid battery 80% (discharge from 100% to 0% and back to 100% charged).




### Specifications

|                  |              |                        |
|------------------|--------------|------------------------|
| Nominal voltage  |              | 24V                    |
| Nominal capacity |              | 150Ah                  |
| Dimensions       | Length       | 442±2mm (17.40inch)    |
|                  | Width        | 480±2mm (18.89inch)    |
|                  | Height       | 222±2mm (8.74inch)     |
|                  | Total height | 222±2mm (8.74inch)     |
| Approx. weight   |              | 35.2kg (77.6lbs)±2.5kg |


### Characteristics

|                                           |                                  |                                                                                                                             |
|-------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Electrical Parameters (25°C)              | Rated Voltage                    | 25.6V                                                                                                                       |
|                                           | Rated Capacity (C <sub>5</sub> ) | 150Ah@25°C                                                                                                                  |
|                                           | Energy                           | 3840Wh                                                                                                                      |
|                                           | Months Self Discharge            | <3%                                                                                                                         |
|                                           | Charge Efficiency                | 99.5%@ 0.2C                                                                                                                 |
|                                           | Discharge Efficiency             | 96-99%@ 1C                                                                                                                  |
| Terminal Diameter                         |                                  | M8                                                                                                                          |
| Internal resistance (Fully charged, 25°C) |                                  | ≤40mΩ                                                                                                                       |
| Cycle life                                |                                  | >3000 cycles @ 0.2C 100%D.O.D                                                                                               |
| Capacity affected by temperature          | 40°C                             | 101%                                                                                                                        |
|                                           | 25°C                             | 100%                                                                                                                        |
|                                           | 0°C                              | 90%                                                                                                                         |
|                                           | -10°C                            | 75%                                                                                                                         |
| Nominal operating temperature             |                                  | 25°C± 3°C (77°F± 5°F)                                                                                                       |
| Operating temperature range               | Discharge                        | - 20°C~ 60°C (-4°F ~ 140°F)                                                                                                 |
|                                           | Charge                           | 0°C~ 45°C (32°F ~ 113°F)                                                                                                    |
|                                           | Storage                          | 0°C~ 40°C (32°F ~ 104°F)                                                                                                    |
| Water Dust Resistance                     |                                  | IP50                                                                                                                        |
| Charge Voltage                            |                                  | 29.2V                                                                                                                       |
| Standard Charge Mode (25°C±2°C, <75%RH)   |                                  | 0.2CA Constant Current to 29.2V, then Constant Voltage 29.2V until the current drops to 0.02CA, before use, rest 30 minutes |
| Charge Current                            |                                  | 40A                                                                                                                         |
| Maximum Charge Current                    |                                  | 100A                                                                                                                        |
| Charge Cut off Voltage                    |                                  | 29.2V                                                                                                                       |
| Continuous Discharge Current              |                                  | 100A                                                                                                                        |
| Maximum Pulse Current                     |                                  | 200A (<500ms)                                                                                                               |
| Discharge Cut Off Voltage                 |                                  | 21.6V                                                                                                                       |
| Communicate Protocol (optional)           |                                  | RS485 (optional)                                                                                                            |
| SOC (optional)                            |                                  | LED/PC Software (optional)                                                                                                  |
| Application connection                    |                                  | 1 string 1 parallel                                                                                                         |
| Mechanical                                | Cells                            | 8 Strings                                                                                                                   |
|                                           | Container                        | Metal                                                                                                                       |


### Outer dimensions (mm)

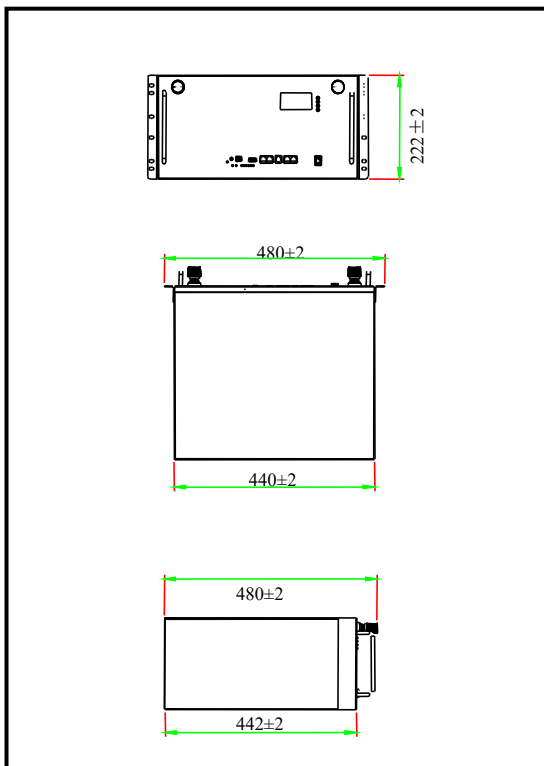


### ● Discharge characteristics (25°C)

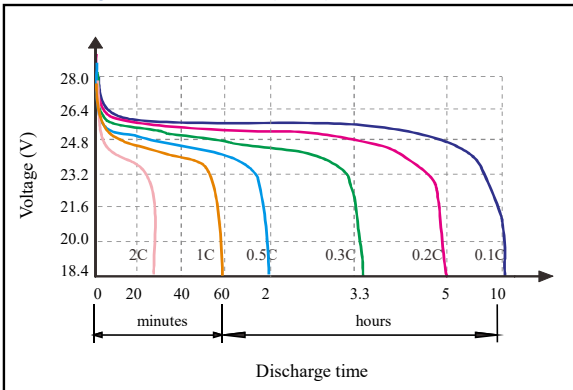


### ● Temperature affect on discharge characteristics (0.5C)

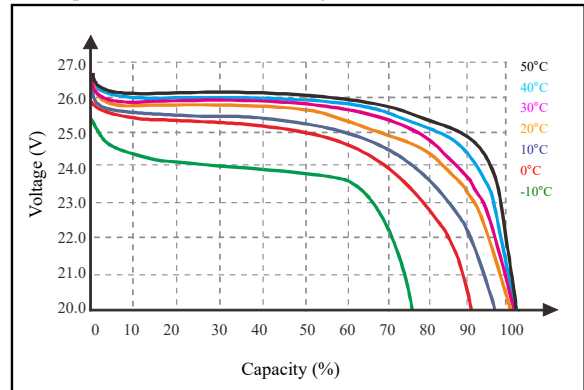


### ● State of Charge Curve (25°C)

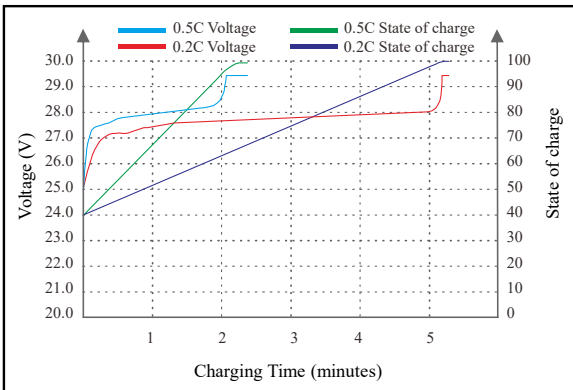


### ● Charge characteristics (25°C)

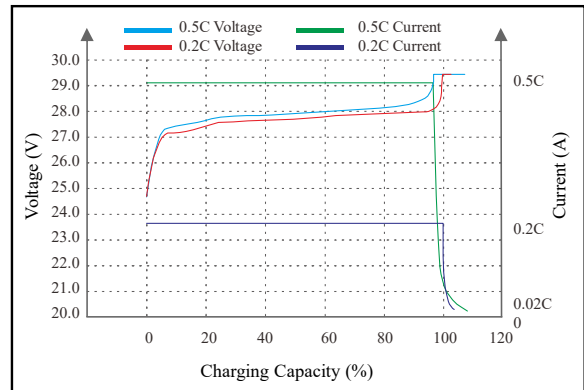

### ● Cycle life on D.O.D (25°C)

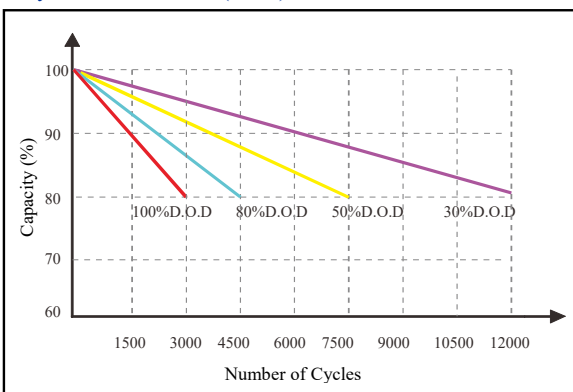

### ● Self Discharge Characteristics Curve

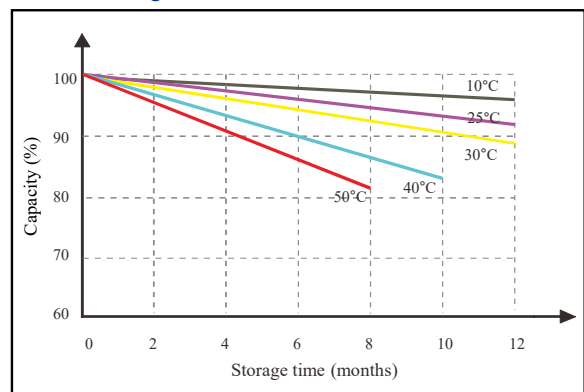

Note 2: The above curves are based on laboratory testing data @ 25°C 40%RH.